



MODULO
ELECTRO
www.modulelectro.ro

Adjustable Display Fittings | Apliques Orientables Interiores



ADF451

ADF452

ADF453

Fittings for display cases, shops, and general lighting. Manufactured from light alloy with grey epoxy finish as standard. Custom finishes available on request.

Apliques para expositores, escaparates e iluminación general. Fabricados en aleación ligera con acabado en epoxi gris. Otros acabados disponibles bajo pedido.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	FINISH
ADF451	Adjustable display fitting 30° lens	Light alloy	Spring	3 / 8mm	50mm	Gray epoxy
ADF452	Adjustable display fitting 60° no lens	Light alloy	Spring	3 / 8mm	50mm	Gray epoxy
ADF453	Adjustable display fitting 30° extended lens	Light alloy	Spring	3 / 8mm	50mm	Gray epoxy

Downlighter Fittings | Apliques Fijos



Range of downlighter fittings for cases and general lighting, with and without lenses and beam angles from 20 to 60°. Different models in light alloy or polymer. For 3mm or 5mm light guides.

Gama de apliques fijos para vitrinas e iluminación general con y sin lente y ángulos de proyección desde 20 a 60°. Diferentes modelos en aleación ligera o polímero. Para guías de 3 o 5mm.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	FINISH
EDF101	Downlighter fitting 25° / 45°	Light alloy	Spring	2 / 5mm	31mm	Epoxi
EDF102	Downlighter fitting 25° / 45°	Polymer	Spring	2 / 5mm	51mm	Natural

Standard finishes: black, white, chrome, stainless steel.



Adjustable Display Fittings | Apliques Orientables Interiores




Range of light alloy fittings with different lens configurations for showcases and other applications requiring spotlighting. Natural finish. Other finishes available on request.

Gama de apliques en aleación ligera con diferentes configuraciones ópticas para vitrinas y otras aplicaciones que requieran iluminación puntual. Acabado natural. Otros acabados disponibles bajo pedido.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	FINISH
ADF811	Adjustable display fitting	Light alloy	Spring	5mm	44mm	Bright anodized
ADF821	Adjustable display fitting	Light alloy	Spring	5mm	44mm	Bright anodized
ADF831	Adjustable display fitting	Light alloy	Spring	5mm	44mm	Bright anodized
ADF841	Adjustable display fitting	Light alloy	Spring	5mm	34mm	Bright anodized


Adjustable Display Fittings | Apliques Orientables Interiores

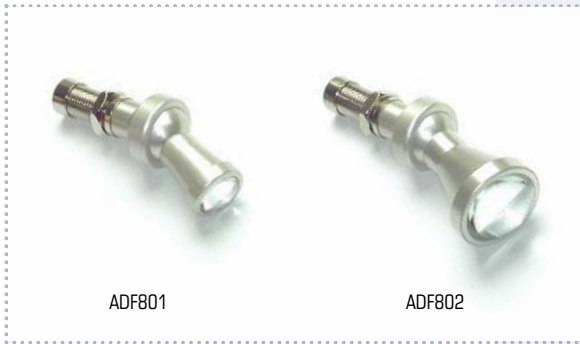

Articulated and adjustable light alloy fittings for display cases and other applications requiring spotlighting. Natural finish. Other finishes available on request.

Apliques articulados y ajustables en aleación ligera para vitrinas y otras aplicaciones que requieran iluminación puntual. Acabado natural. Otros acabados disponibles bajo pedido.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	FINISH
ADF801	Adjustable display fitting 30° lens	Light alloy	Thread	3 / 5mm	18mm	Bright anodized
ADF802	Adjustable display fitting 20° lens	Light alloy	Thread	3 / 5mm	28mm	Bright anodized

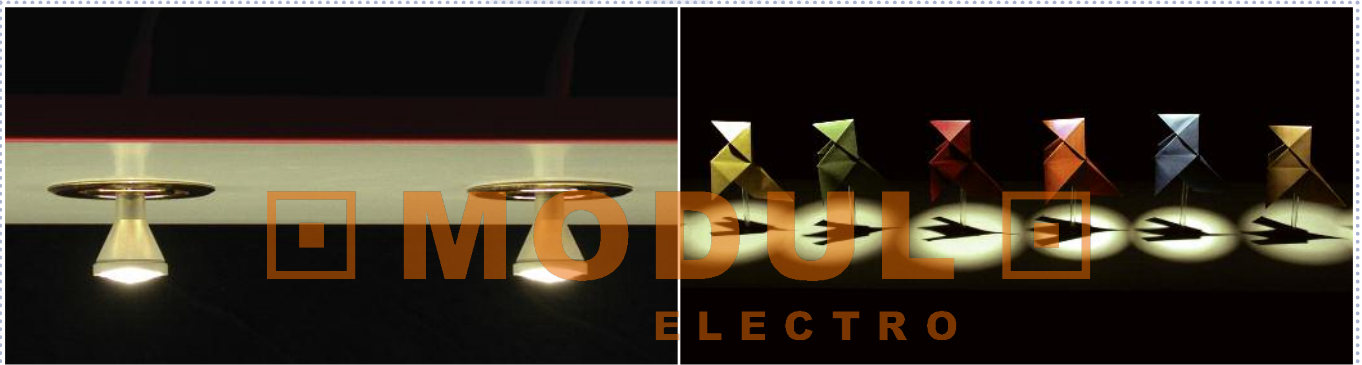

www.modulelectro.ru

Adjustable Display Fittings | Apliques Orientables Interiores



Range of light alloy fittings with different lens configurations for showcases and other applications requiring spotlighting. Natural finish. Other finishes available on request.

Gama de apliques en aleación ligera con diferentes configuraciones ópticas para vitrinas y otras aplicaciones que requieran iluminación puntual. Acabado natural. Otros acabados disponibles bajo pedido.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	LENS
ADF421	Adjustable display fitting	Polymer	Spring	3 / 5mm	50mm	30° / 50°
ADF431	Adjustable display fitting	Polymer	Spring	3 / 5mm	50mm	25° / 45°
ADF432	Adjustable display fitting	Light alloy	Spring	3 / 5mm	50mm	25° / 45°
ADF441	Adjustable display fitting	Light alloy	Spring	3 / 5mm	38mm	15° / 30°
ADF442	Adjustable display fitting	Light alloy	Spring	3 / 5mm	38mm	15° / 30°

Standard finishes: black, white, chrome, stainless steel.



Adjustable & Downlight Display Fittings | Apliques Orientables y Fijos Interiores



Downlight and adjustable light alloy fittings for installation of profiles or thin panels with rear access in display cases and other applications requiring spotlighting.

Apliques orientables y fijos en aleación ligera para su instalación en perfiles y paramentos delgados en vitrinas y otras aplicaciones que requieran iluminación puntual. Acabado natural.

CODE	PRODUCT	MATERIAL	FIT	FIBER Ø	OUTER Ø	FINISH
ADF601	Adjustable display fitting	Light alloy	Spring	3 / 8mm	90mm	Matt anodized
ADF701	Downlight display fitting / frosted glass	Light alloy	Spring	3 / 8mm	73mm	Matt anodized







Range of light fixtures in light alloy up to 3,000mm long (L) and widths (W) from 100 to 600mm. For applications requiring light without heat or radiation in museums, control rooms or environments requiring special lighting. Customizable with the full range of Advanced fiber fittings.

Gama de luminarias en aleación ligera con dimensiones de hasta 3.000mm (L) y anchos (W) de hasta 600mm. Para aplicaciones que requieran luz sin calor o radiación, en museos, salas de control y entornos que requieran condiciones lumínicas especiales. Aceptan todos los apliques para fibra de Advanced.

MODUL
ELECTRO

www.modulelectro.ru




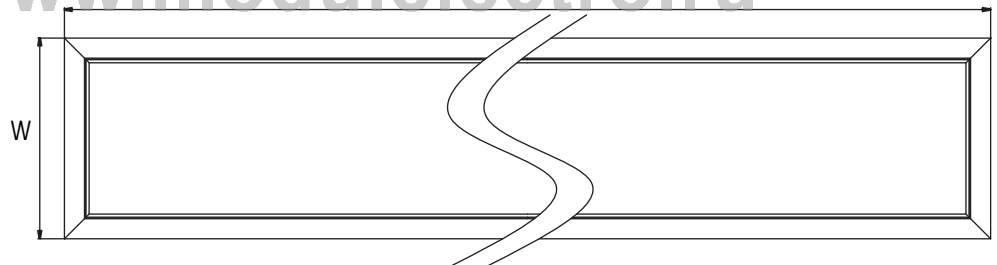



Custom Light Bars | Perfiles Luminosos a Medida



Range of light bars in light alloy up to 3,000mm long. For lighting applications without heat or radiation in museums, control rooms or environments requiring special lighting. Customizable with different fiber configurations and fittings.

Gama de perfiles en aleación ligera hasta 3.000mm. Para aplicaciones de iluminación sin calor o radiación, en museos, salas de control y entornos que requieran condiciones lumínicas especiales. Disponibles con diferentes configuraciones de fibra / apliques.



End Trims | Terminales Decorativos



Fittings for decoration and signage with different viewing angles. For fiber up to 2mm (FET100) and up to 1mm (FET200). Also, decorative trims (FET300 & 400), and textile mounting clips for attaching fibers to curtains and backdrops (TMC300 & 400).

Terminales para decoración y señalización, con diferentes ángulos de visionado. Para fibras de hasta 2mm (FET100) y hasta 1mm (FET200) con embellecedores (FET300 y 400), y clips para textiles, para incorporar fibras en cortinas y telones. (TMC300 y 400).

CODE	PRODUCT	Ø	FIBER Ø
FET101	Cylinder fiber end trim	8mm	Up to 2 mm
FET102	Fresnel fiber end trim	8mm	Up to 2 mm
FET103	Dome fiber end trim	8mm	Up to 2 mm
FET104	Cone fiber end trim	8mm	Up to 2 mm
FET105	Pyramid fiber end trim	8mm	Up to 2 mm
FET301	Chrome gasket	10mm	N/A
FET302	Gold plated gasket	10mm	N/A
TMC301	Textile clip	N/A	N/A

CODE	PRODUCT	Ø	FIBER Ø
FET201	Cylinder fiber end trim	4mm	Up to 1 mm
FET202	Fresnel fiber end trim	4mm	Up to 1 mm
FET203	Dome fiber end trim	4mm	Up to 1 mm
FET204	Cone fiber end trim	4mm	Up to 1 mm
FET205	Pyramid fiber end trim	4mm	Up to 1 mm
FET401	Chrome gasket	6mm	N/A
FET402	Gold plated gasket	6mm	N/A
TMC401	Textile clip	N/A	N/A

MODULO

Decorative End Fittings | Terminales Decorativos

www.modulelectro.ru



Fittings for signage and decoration. Available in either frosted or clear finish with a barbed fastener for blind hole installation or M10 screw fit for fitting in thin sheets or boards. Ø20mm.

Terminales para aplicaciones decorativas y señalización. Actúan como lentes para mejorar la visión. Disponibles en acabado transparente o matizado y con accesorios de montaje en cualquier paramento, incluso paneles y planchas finas. Ø20mm.

CODE	PRODUCT	FIX	FINISH
DEF101	30° lens end fitting	Barbed	Frosted
DEF201	Cylinder end fitting	Barbed	Frosted
DEF301	Cone end fitting	Barbed	Frosted
DEF401	Dome end fitting	Barbed	Frosted
DEF501	Pyramid end fitting	Barbed	Frosted
DEF102	30° lens end fitting	Barbed	Clear
DEF202	Cylinder end fitting	Barbed	Clear
DEF302	Cone end fitting	Barbed	Clear
DEF402	Dome end fitting	Barbed	Clear
DEF502	Pyramid end fitting	Barbed	Clear

CODE	PRODUCT	FIX	FINISH
DEF111	30° lens end fitting	Thread	Frosted
DEF211	Cylinder end fitting	Thread	Frosted
DEF311	Cone end fitting	Thread	Frosted
DEF411	Dome end fitting	Thread	Frosted
DEF511	Pyramid end fitting	Thread	Frosted
DEF112	30° lens end fitting	Thread	Clear
DEF212	Cylinder end fitting	Thread	Clear
DEF312	Cone end fitting	Thread	Clear
DEF412	Dome end fitting	Thread	Clear
DEF512	Pyramid end fitting	Thread	Clear



Cut Crystal Fittings | Terminales de Cristal



Cut crystals for decoration, to highlight a constellation, or simply for their beautiful reflections on the installation surface. Various suspension kits are available and need to be ordered separately.

Gama de terminales de cristal tallado, para decoración y potenciar efectos en cielos estrellados, etc. Disponemos de diferentes accesorios de montaje para ser pedidos aparte.

CODE	PRODUCT	FIBER Ø	FINISH	DIMENSIONS
CCF201	Button cut crystal fitting	3 / 6,5mm	Polished brass	Ø22mm x H 16mm
CCF203	Ball cut crystal fitting	3 / 6,5mm	Polished brass	Ø30mm x H 42mm
CCF208	Prism cut crystal fitting	3 / 6,5mm	Polished brass	Ø14mm x H 58mm
CCF210	Prism cut crystal fitting	3 / 6,5mm	Polished brass	Ø11mm x H 17mm
CCF214	Prism cut crystal fitting	3 / 6,5mm	Polished brass	Ø14mm x H 32mm

Also available custom crystals of any shape or size, with or without added security suspension systems for installation in public venues or to hold heavy crystals at great heights.



Cut Crystal Fittings | Terminales de Cristal



Cut crystals for decoration, starry skies, or simply for their beautiful reflections on the installation surface. Pressure fit in small-diameter holes.

Gama de terminales de cristal tallado, para decoración, cielos estrellados, o para proyectar reflejos en la superficie de instalación. Se instalan a presión en orificios practicados en el paramento.

CODE	PRODUCT	LIGHT GUIDE Ø	STANDARD FINISH	DIMENSIONS
CCF221	Prism cut crystal fitting	3mm	Chrome	Ø16mm x H 34mm
CCF222	Prism cut crystal fitting	3mm	Chrome	Ø16mm x H 30mm
CCF223	Prism cut crystal fitting	3mm	Chrome	Ø16mm x H 11mm
CCF224	Prism cut crystal fitting	3mm	Chrome	Ø16mm x H 15mm

Other finishes: gold and stainless steel. Mounting sleeves available on request.

Fiber Glass Pavers IP68 | Bloques de Vidrio para Fibra IP68



LFF104

Square glass pavers without maintenance for 3mm light guides. A single illuminator can power up to 90 units. IP68. With the correct illuminator these pavers can change color or be configured for RGB operation as a low cost alternative to LED.

Bloques de vidrio cuadrados, sin mantenimiento, para guía de 3mm. Un solo iluminador puede alimentar hasta 90 unidades. IP68. Con el iluminador adecuado estos bloques pueden cambiar de color o configurarse como RGB para una alternativa económica a los LED.

CODE	PRODUCT	FINISH	DIMENSIONS
LFF104	Fiber glass paver	Frosted / opal	L 100 x W 100 x H 70mm
LOP211	Installation / burial box in zinc-plated CRS	Natural	L 105 x W 105 x H 200mm
LOP212	Installation / burial box in AISI316 stainless steel	Natural	L 105 x W 105 x H 200mm

Custom finishes and configurations available on request.



Zinc plated installation boxes are not suitable for installation in wet areas, as they eventually rust. For outdoor installation we recommend AISI 316 stainless steel boxes.

Las cajas de instalación de chapa cincada no son adecuadas para zonas húmedas, ya que sufren oxidación. Para instalaciones en exteriores recomendamos las cajas en acero inoxidable AISI 316.

Fiber Glass Pavers IP68 | Bloques de Vidrio para Fibra IP68



LFF304

Small square glass pavers without maintenance for 3mm light guides. A single illuminator can power up to 90 units. IP68. With the correct illuminator these pavers can change color or be configured for RGB operation as a low cost alternative to LED.

Pequeños bloques de vidrio cuadrados, sin mantenimiento, para guía de 3mm. Un solo iluminador puede alimentar hasta 90 unidades. IP68. Con el iluminador adecuado estos bloques pueden cambiar de color o configurarse como RGB para una alternativa económica a los LED.

CODE	PRODUCT	FINISH	DIMENSIONS
LFF304	Fiber glass paver	Frosted / opal	L 60 x W 60 x H 60mm
LOP231	Installation / burial box in zinc-plated CRS	Natural	L 65 x W 65 x H 120mm
LOP232	Installation / burial box in AISI316 stainless steel	Natural	L 65 x W 65 x H 120mm

Custom finishes and configurations available on request.



Fiber Glass Pavers IP68 | Bloques de Vidrio para Fibra IP68




Round glass pavers without maintenance for 3mm light guides. A single illuminator can power up to 90 units. IP68. With the correct illuminator these pavers can change color or be configured for RGB operation as a low cost alternative to LED.

Bloques de vidrio redondos, sin mantenimiento, para guía de 3mm. Un solo iluminador puede alimentar hasta 90 unidades. IP68. Con el iluminador adecuado estos bloques pueden cambiar de color o configurarse como RGB para una alternativa económica a los LED.

CODE	PRODUCT	FINISH	DIMENSIONS
LFF204	Fiber glass paver	Frosted / opal	Ø105 x H 70mm
LOP221	Installation / burial box in zinc-plated CRS	Natural	Ø110 x H 200mm
LOP222	Installation / burial box in AISI316 stainless steel	Natural	Ø110 x H 200mm

Custom finishes and configurations on request.

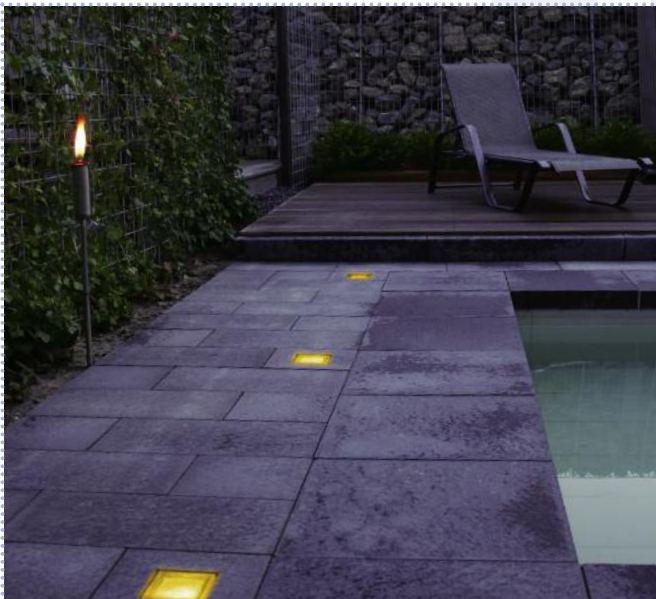

Waterproof Light Fittings IP68 | Apliques Estancos IP68



WLF710 SERIES



WLF750 SERIES

Discrete fiber optic fittings with IP68 rating. Externally threaded and supplied with nuts and gaskets. Manufactured from AISI 316 stainless steel. Model to be ordered according to fiber diameters.

Apliques con protección IP68, y suministrados con juntas y roscas. Fabricados en acero inoxidable AISI 316. Diferentes referencias según fibra a utilizar.

CODE	PRODUCT	FIBER Ø	OUTER Ø	MATERIAL
WLF711	Waterproof light fitting	1,00mm	25mm	Stainless steel
WLF712	Waterproof light fitting	2,00mm	25mm	Stainless steel
WLF713	Waterproof light fitting	3,00mm	25mm	Stainless steel
WLF751	Waterproof light fitting	5,00mm	45mm	Stainless steel
WLF752	Waterproof light fitting	6,50mm	45mm	Stainless steel
WLF753	Waterproof light fitting	8,00mm	45mm	Stainless steel

These fittings are suitable for underwater installation in pools and fountains.



Miniature Waterproof Light Fittings | Apliques Estancos Miniatura



Miniature fittings for step, deck, corridors, staircases, and star ceilings in floors, saunas, pools and other wet locations.

Apliques miniatura para pasillos, porches, peldaños y cielos estrellados en suelos, saunas, piscinas y otros espacios húmedos.

CODE	PRODUCT	FIBER Ø	OUTER Ø	MATERIAL
WLF901	Miniature waterproof light fitting	1 / 1,5mm	12mm	Stainless steel
WLF902	Miniature waterproof light fitting	1,5 / 2mm	20mm	Stainless steel
WLF910	Miniature waterproof light fitting	1 / 6,5mm	16mm	Stainless steel


Waterproof Light Fittings IP68 | Apliques Estancos IP68



For fountains, pools, waterworks, jets and other wet-locations. ODF500 series, manufactured of marine grade AISI 316 stainless steel and to IP68 standards. Includes mounting bracket.

Gama para fuentes, piscinas, juegos de aguas, surtidores y zonas húmedas. Fabricados en acero inoxidable grado marino AISI 316 y estancos IP68. Incluyen soporte.

CODE	PRODUCT	LENS TYPE	FIBER Ø	OUTER Ø
ODF501	Outdoor directional fitting	17° fresnel	5,00mm	43mm
ODF511	Outdoor directional fitting	48° mineral	5,00mm	43mm
ODF502	Outdoor directional fitting	17° fresnel	6,50mm	43mm
ODF512	Outdoor directional fitting	48° mineral	6,50mm	43mm
ODF503	Outdoor directional fitting	17° fresnel	8,00mm	43mm
ODF513	Outdoor directional fitting	48° mineral	8,00mm	43mm

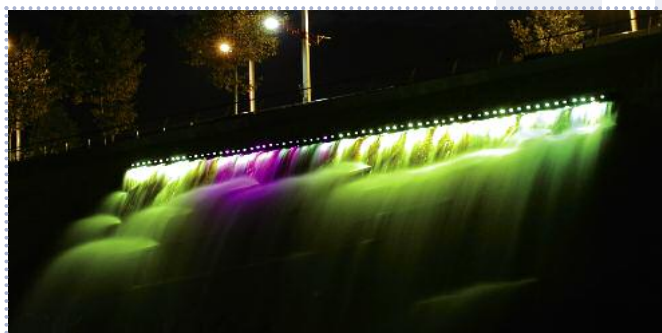

Waterproof Light Fittings | Apliques Estancos



WLF451/461



WLF452/462

Fittings with round or square top for in-ground installation, with or without a 30° lens. Light alloy body with stainless steel cover and PVC. Installation box included. IP67.

Apliques para empotrar en suelos y paramentos, con embellecedor en acero inoxidable redondo o cuadrado. Con o sin lente ajustable de 30°. Cuerpo en aleación ligera y caja de montaje en PVC. IP67.

CODE	PRODUCT	TOP PLATE DIMENSIONS	MATERIAL
WLF451	Waterproof light fitting 60°. Adjustable. Round trim cover	Ø115mm	S. Steel / light alloy
WLF452	Waterproof light fitting 60°. Adjustable. Square trim cover	110mm x 110mm	S. Steel / light alloy
WLF461	Waterproof light fitting 30°. Adjustable. Round trim cover	Ø115mm	S. Steel / light alloy
WLF462	Waterproof light fitting 30°. Adjustable. Square trim cover	110mm x 110mm	S. Steel / light alloy

For in-ground installation these fixtures need drainage.



ELECTRO

Waterproof Light Fittings IP68 | Apliques Estancos IP68



WLF800 SERIES



WLF810 SERIES

ABS pool fittings in white and chrome finish. Choice of spot or flood lenses included. Different versions available according to type of pool and installation method. IP68.

Gama de apliques de piscina en ABS, con acabado blanco o cromado. Incluyen lentes intensivas y extensivas. Diferentes versiones según tipo de piscina y modo de instalación. IP68.

CODE	PRODUCT	OUTER Ø	MATERIAL
WLF801	Waterproof light fittings for concrete pools. Threaded	118mm	White ABS
WLF802	Waterproof light fittings for concrete pools. Unthreaded	118mm	White ABS
WLF803	Waterproof light fittings for liner pools	118mm	White ABS
WLF804	Waterproof light fittings for fiberglass & plastic pools	118mm	White ABS
WLF811	Waterproof light fittings for concrete pools. Threaded	118mm	Chromed ABS
WLF812	Waterproof light fittings for concrete pools. Unthreaded	118mm	Chromed ABS
WLF813	Waterproof light fittings for liner pools	118mm	Chromed ABS
WLF814	Waterproof light fittings for fiberglass & plastic pools	118mm	Chromed ABS

Waterproof Light Fittings IP68 | Apliques Estancos IP68



WLF761



WLF762

Waterproof fitting for installation in floors, walls or underwater, in 316 stainless steel. Snug fitting with o-rings in standard Ø40mm PVC tubes. IP68. Suitable for 3mm light guides. A Standard MHI or MDI illuminator can power up to 90 fittings.

Aplique estanco para instalación en suelos, paredes o sumergido, en acero inoxidable 316. Colocación a presión con juntas tóricas en tubos de PVC de Ø40mm. IP68. Para guías de 3mm. Un iluminador estándar, MHI o MDI puede alimentar hasta 90 unidades.

CODE	PRODUCT	FIBER Ø	OUTER DIMENSIONS	MATERIAL
WLF761	Waterproof light fitting. Round trim cover	3mm	Ø45mm	Stainless steel
WLP762	Waterproof light fitting. Square trim cover	3mm	45 x 45mm	Stainless steel

Other finishes and configurations available on request.

Waterproof Adjustable Fitting IP68 | Aplique Estanco Orientable IP68



WLF770




WLF780


Adjustable fittings for step, deck, corridors, staircases, saunas, pools and other wet locations. Manufactured off AISI 316 marine grade stainless steel. IP68.

Apliques orientables para pasillos, porches, suelos, saunas, piscinas y otros espacios húmedos. Fabricados en acero inoxidable AISI 316. IP68.

CODE	PRODUCT	LENS TYPE	FIBER Ø	OUTER Ø
WLF770	Waterproof adjustable fitting	20 / 40°	2 / 6,5mm	75mm
WLF780	Waterproof adjustable fitting	20 / 40°	2 / 3mm	52mm

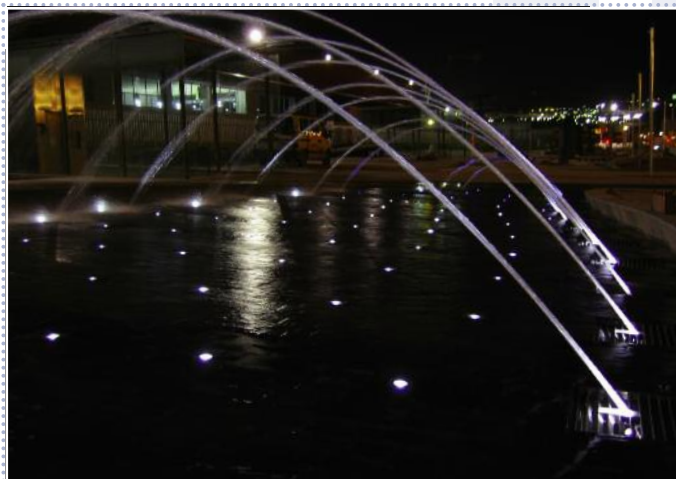

Outdoor Light Pavers | Apliques Exteriores

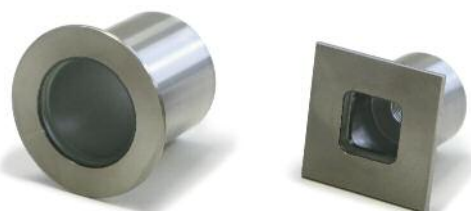

WLF470


WLF480

Outdoor fittings in stainless steel, for installation on floors and walls. A standard MHI or MDI illuminator can power up to 90 fittings.

Aplique exteriores en acero inoxidable, para instalación en paramentos horizontales o verticales. Un iluminador estándar, MHI o MDI puede alimentar hasta 90 unidades.

CODE	PRODUCT	FIBER Ø	OUTER DIMENSIONS	MATERIAL
WLF470	Outdoor light paver. Round trim cover	3 / 6,5mm	Ø47mm	Stainless steel
WLF480	Outdoor light paver. Square trim cover	3 / 6,5mm	47 x 47mm	Stainless steel

Other finishes, sizes and configurations available on request.

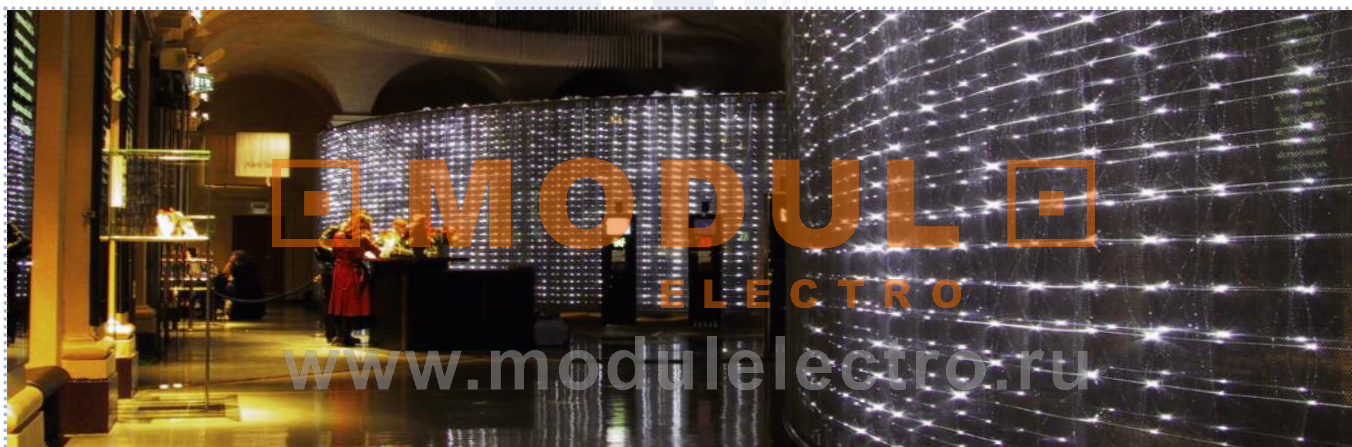

Decorative Light Fittings | Apliques Decorativos



WLF763


WLF764

Decorative fitting for installation on floors and walls in wet or dry locations. Manufactured off light alloy. Snug fitting with rings in standard Ø40mm PVC tubes. Suitable for 3mm light guides. A standard MHI or MDI illuminator can power up to 90 fittings.

Aplique decorativo para instalación en suelos o paredes en interiores o exteriores. Fabricado en aleación ligera. Colocación a presión con juntas tóricas en tubos de PVC de Ø40mm. Para guías de 3mm. Un iluminador estándar, MHI o MDI puede alimentar hasta 90 unidades.

CODE	PRODUCT	FIBER Ø	OUTER DIMENSIONS	MATERIAL
WLF763	Waterproof light fitting. Round trim cover	3mm	Ø45mm	Light alloy
WLP764	Waterproof light fitting. Square trim cover	3mm	45 x 45mm	Light alloy


Other finishes and configurations available on request.

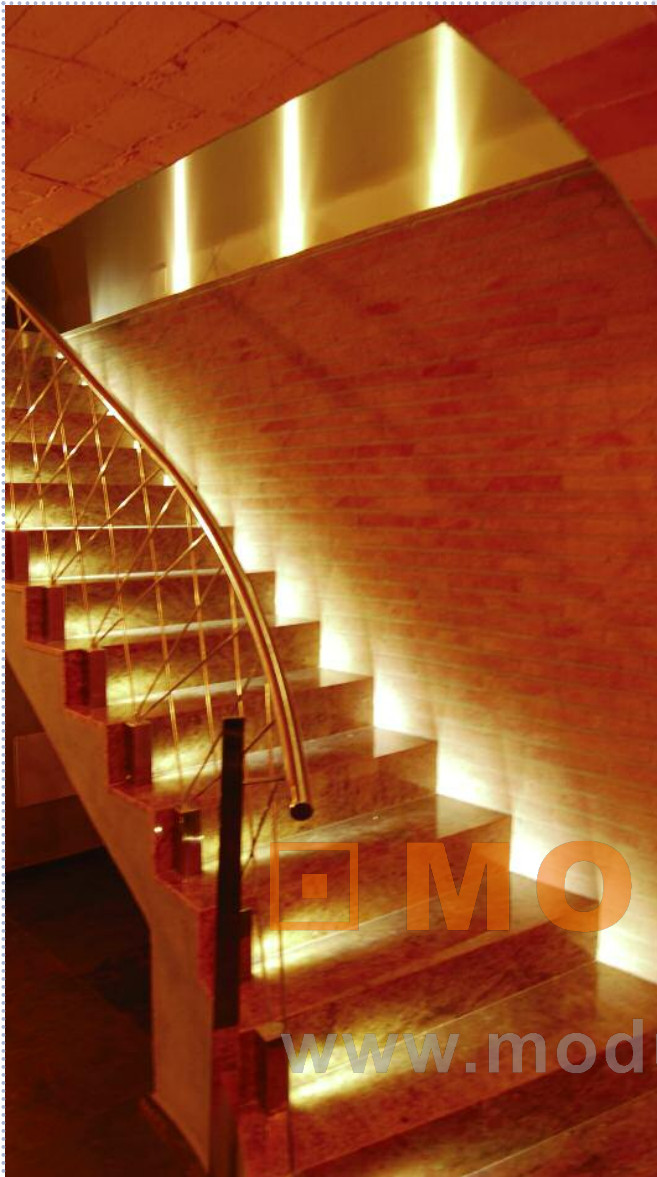

MODUL
ELECTRO
www.modulelectro.ru



Waterproof Light Fittings | Apliques Estancos

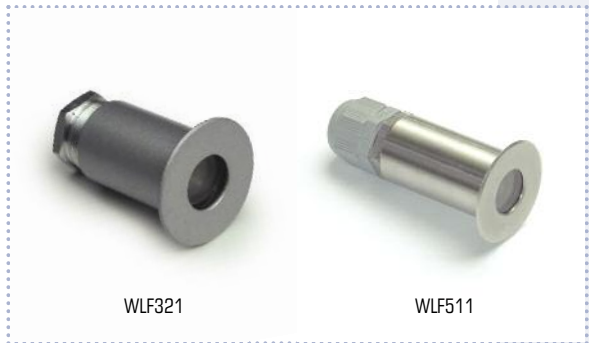

WLF321

WLF511

WLF321 and WLF511 fittings for step, corridor, and staircase lighting in saunas, outdoors and other wet locations. Manufactured off light alloy or stainless steel.

Apliques WLF321 y WLF511 para pasillos y peldaños en saunas, exteriores y otros espacios húmedos. Fabricados en aleación ligera o acero inoxidable.

CODE	PRODUCT	FIBER Ø	OUTER Ø	MATERIAL
WLF321	Waterproof light fitting with 30° asymmetrical lens	3 / 8mm	37mm	Light alloy
WLF511	Waterproof light fitting with 30° lens	3 / 6,5mm	37mm	Stainless steel



Waterfalls | Cascadas



No fiber optic pool is complete without the waterfall fittings. The fiber illuminates the water pumped through the unit from the back, to boast an impressive sheet of colored water: Easy to install. from 300 to 2,400mm.

Ninguna piscina está completa sin las cascadas de agua. Permiten obtener el efecto espectacular de una lámina de agua iluminada. Fácil de instalar. Tamaños disponibles entre 300 y 2.400mm.

SERIES	PRODUCT	WIDTH	SPOUT
OAF	Oasis Arch Falls	From 304,8mm to 1219,2mm	From 25,4mm to 304,8mm
OCF	Oasis Curtain Falls	From 304,8mm to 1219,2mm	From 152,4mm to 304,8mm
ONF	Oasis Curtain Falls	From 304,8mm to 2438,4mm	228,6mm
ORF	Oasis Rainforest Falls	From 304,8mm to 2438,4mm	From 25,4mm to 304,8mm
OSR	Oasis Starlight Rainforest	From 304,8mm to 2438,4mm	228,6mm
OSW	Oasis Standar Waterfalls	From 304,8mm to 2438,4mm	From 25,4mm to 304,8mm

Waterfall fittings are custom made, in any size up to 2400mm and can be shaped to curved surfaces.

Please allow from 8 to 12-week delivery.

MODUL

www.modulelectro.ru

