


• MODUL •

www.modulelectro.rx







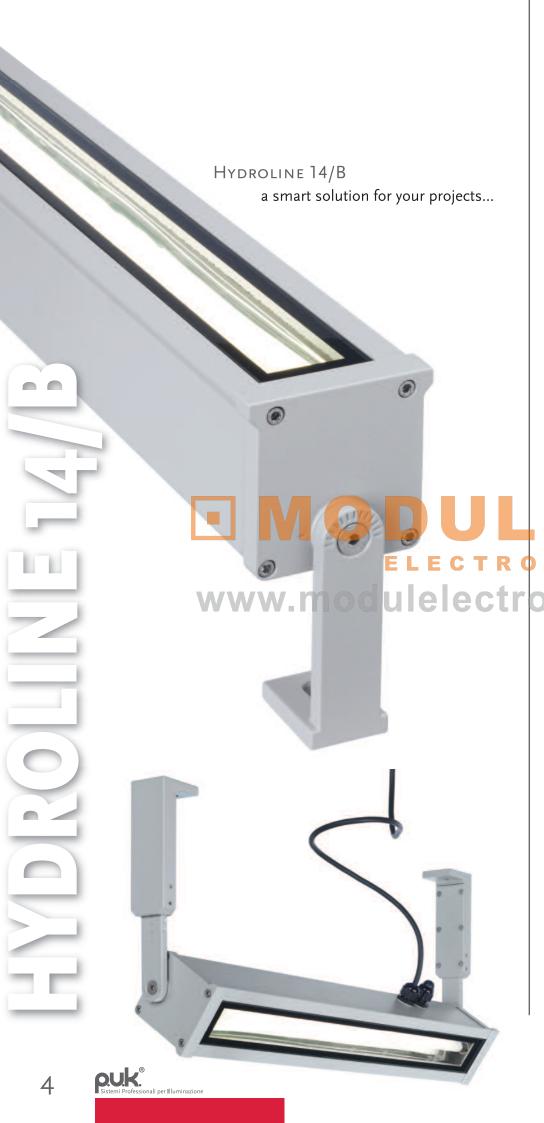



Hydroline/B IP67 is the perfect solution to obtain pleasant and soft lighting effects on building walls, floors, cornices, profiles, window sills in public areas or private buildings perimeters both Outdoor or Indoor thanks to his low visual impact.

Hydroline/B IP67 is complete with an electronic ballast and ready for parallel connection of several luminaires.





- 230 V (220 → 240V) short circuit and overload protected
- 14 watt
- Stainless steel screws
- High corrosion resistance die-cast aluminium body
- Polyestere painting with phosphocromating pre-finishing
- Clear tempered glass standard (completely frosted glass on request)
- Protection against impact
 IK 10 (20 joule)
- T-5 **bulb G5** socket fluorescent
- Pg 13.5 cable gland
 (Ø 6÷12 mm wires)
- Unit Gross weight Kg 3,3

Warning! Always follow system standard rules when installing "Hydroline IP67".

HYDROLINE 14/B

14 Watt max

T5 / G5 electronic

220-240 Volts / 50-60 Hz

IP67 - C€ ♥ 🗆

Clear glass standard

(completely frosted glass on request)



S = Symmetricreflector





14/B

HL-01: Wall extensible bracket

Die-cast aluminum (option to be ordered separately)



360 mm





Standard bracket (included)







Hydroline/B IP67 is the perfect solution to obtain pleasant and soft lighting effects on building walls, floors, cornices, profiles, window sills in public areas or private buildings perimeters both Outdoor or Indoor thanks to his low visual impact.

Hydroline/B IP67 is complete with an electronic ballast and ready for parallel connection of several luminaires.





- 230 V (220 → 240V) short
 circuit and overload protected
- **21** watt
- Stainless steel screws
- High corrosion resistance die-cast aluminium body
- Polyestere painting with phosphocromating pre-finishing
- Clear tempered glass standard (completely frosted glass on request)
- Protection against impact
 IK 10 (20 joule)
- T-5 **bulb G5** socket fluorescent
- Pg 13.5 cable gland
 (Ø 6÷12 mm wires)
- Unit Gross weight Kg 4,3

Warning! Always follow system standard rules when installing "Hydroline IP67".

HYDROLINE 21/B

21 Watt max

T5 / G5 electronic

220-240 Volts / 50-60 Hz

IP67 - C€ ♥ 🗆

Clear glass standard

(completely frosted glass on request)



S = Symmetricreflector





21/B

HL-01: Wall extensible bracket

Die-cast aluminum (option to be ordered separately)









150 mm







mounting stem, provides rotation for easy aiming. Three main versions available:
Halogen 230 V GU 10,

Halogen 230 V GU 10, Halogen 12 V AR 111 and H.Q.I. metal halides.



Hydrokubo Mini



HYDROKUBO MEDIO

- Completely made of die cast aluminium
- Integrated electronic components
- Pure aluminium reflectors
 99.98% and tempered safety
 glasses
- Silicon rubber gaskets
 Phosphochromated and polyestere painting

Available colours:



TEXTUR



MATT WHITE (ON REQUEST)









An "Hi-Tech" design, ultra compact but powerful fixtures range. Ideal for indoor and outdoor applications, with limited mounting area, or for accenting delicate architectural or landscape details.

The fully adjustable mounting stem, provides rotation for easy aiming.

Hydrokubo Mini

• MODUL •

ELECTRO

www.modulelectro.ru



Available colours:



TEXTUR



MATT WHITE (ON REQUEST)



Hydrokubo Mini 01 - ES50

50 WATT MAX

QPAR 16 - BASE GU10


230 VOLTS conventional

IP65 - C€ ♥ 🖨

1,2 kg unit gross weight



(3 Brackets always included)







Wall Bracket (movable)



Hydrokubo Mini 01 - ES50



Ceiling/Wall/Ground Bracket (movable)

Hydrokubo Mini 02 - ES50

50 WATT MAX

QPAR 16 - BASE GU10

230 VOLTS Conventional

IP65 - (€ ♥ 🖨

3 kg unit gross weight



ES50 - 230 Volts QPAR16







An "Hi-Tech" design, ultra compact but powerful fixtures range. Ideal for indoor and outdoor applications, with limited mounting area, or for accenting delicate architectural or landscape details. The fully adjustable mounting stem, provides

rotation for easy aiming.

- Completely made of die cast aluminium
- Integrated electronic components
- Pure aluminium reflectors 99.98% and tempered safety glasses
- Silicon rubber gaskets Phosphochromated and polyestere painting



HYDROKUBO MEDIO 01 - AR111





Available colours:



TEXTUR



MATT WHITE (ON REQUEST)



HYDROKUBO MEDIO 01 - AR111

50 WATT MAX

AR-111 - BASE G53

230 VOLTS Conventional


With transformer integrated



IP65 - (€ ♥ 🕒

2,5 kg unit gross weight


(3 Brackets always included)





Ceiling Bracket (fix)

Wall Bracket (movable)

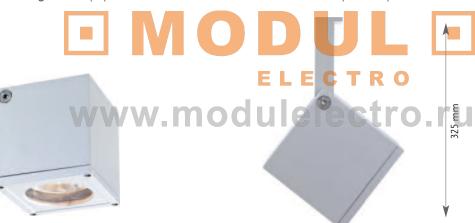

Ceiling/Wall/Ground Bracket (movable)

HYDROKUBO MEDIO 02 - AR111

50 WATT MAX

AR-111 - BASE G53

230 VOLTS Conventional

With transformer integrated

IP65 - (€ ♥ ⊕

4 kg unit gross weight

700 mm



AR-111 - Base G53



Hydrokubo Medio 02 - AR111

HYDROKUBO MEDIO



An "Hi-Tech" design, ultra compact but powerful fixtures range. Ideal for indoor and outdoor applications, with limited mounting area, or for accenting delicate architectural or landscape details. The fully adjustable mounting stem, provides

rotation for easy aiming.

- Completely made of die cast aluminium
- Integrated electronic components
- Pure aluminium reflectors 99.98% and tempered safety glasses
- Silicon rubber gaskets Phosphochromated and polyestere painting



HYDROKUBO MEDIO 01 - H.Q.I.





Available colours:



TEXTUR



MATT WHITE (ON REQUEST)




Hydrokubo Medio 01 - H.Q.I. (spot 5°)

20 WATT MAX BASE PGJ5 230 VOLTS Conventional With ballast integrated IP65 - (€ 🔻 🖨



2,5 kg unit gross weight


(3 Brackets always included)






Ceiling Bracket (fix)

Wall Bracket (movable)

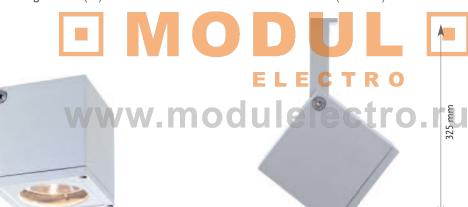

Ceiling/Wall/Ground Bracket (movable)

Hydrokubo Medio 02 - H.Q.I.

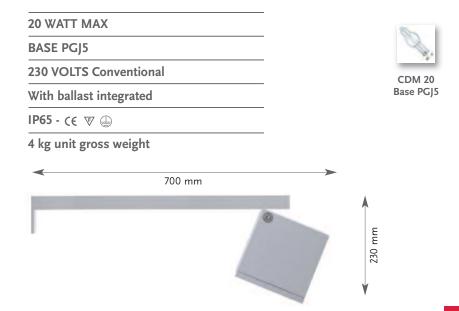



Нудкокиво Medio 02 - H.Q.I.



All articles in this catalogue are made in Italy.
All rights reserved

www.puk.it

